



CH series

CH-8BV (Compound feed and walking foot, reverse stitch, with binder / vibrating type)

- Features
- * Binder is vibrating type and due to this feature, a beautiful tape binding finish for heavy materials or elastic tape can smoothly and easily be performed.
 - * Various kinds of binders are provided with your requirements.

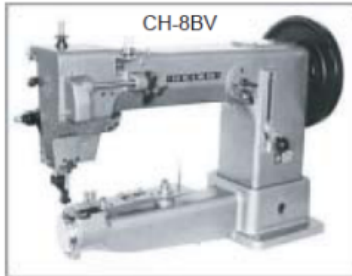

Specifications (CH-□)

Variety	2 / RF	2B	6B	7B	8B	8BV
Number of needle	Single needle					
Max. sewing speed	700 s.p.m.	800 s.p.m.				700 s.p.m.
Max. stitch length	15/64"(6 mm) Upper 15/32"(12 mm) Lower	25/64" (10 mm)				9/32" (7 mm)
Clearance under presser foot	by knee	15/32" (12 mm)	63/64"(25 mm)	25/32" (20 mm)	63/64"(25 mm)	3/4"(19 mm)
	by hand	5/16" (8 mm)	25/64"(10 mm)	25/64"(10 mm)	25/64"(10 mm)	5/16"(8 mm)
Needle bar stroke	2" (51 mm)	2-13/64"(56 mm)	2" (51 mm)		2-13/64"(56 mm)	
Needle(standard)	DYx3 (#24) 794(#180)		DDx1(#25) 328(#200)	DDx1(#24) 328(#180)	DYx3 (#24) 794(#180)	
Hook	Shuttle hook					
Amount of lift of walking foot	1/8"-15/64" standard 5/32" (3 - 6 mm) (standard 4 mm)		—		1/8"-15/64" standard 5/32" (3 - 6 mm) (standard 4 mm)	
Thread take up lever	Cam type					
Lubrication	Hand type					
Bed size	23-5/8"x 3-15/64" (600 x 82 mm)					
Cylinder size	3-15/64" (82 mm) dia.					
Working space	15-3/4"x 7-7/8" (400 x 200 mm)					
Motor	Clutch motor					