


MG-4D-45 | SEWING MACHINE FOR HOSIERY AND LINGERIE

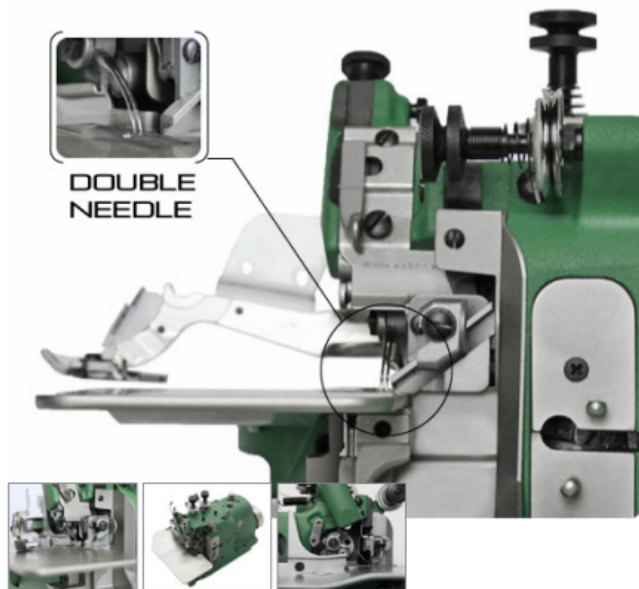

DOUBLE
NEEDLE

Description

The MG-4D-45 is designed to sew a narrow seam on Athletic Socks or to add a panel seam on lingerie and pantyhose

→ Stitch Samples



→

OPERATING SPEED	5500 RPM
STITCH WIDTH	1/8" - 3/16"
STITCH RANGE	20 - 40 SPI
STANDARD NEEDLE	MERROW B1SDT
MERROW NEEDLE RANGE	MERROW B1SDT-B2SDT
FEDERAL STITCH TYPE	521
MOTOR REQUIRED*	Merrow M12, 1/2HP, 3450 RPM
NUMBER OF THREADS	3-6

MG-4D-45 Applications

TOE CLOSING SEAM FOR
LADIES' HOSIERY



TWO-NEEDLE STRUCTURAL
SEAM FOR CHIFFON CAMISOLE



The Advantage of the MG-4D-45

The MG-4D-45 is a two-needle, three-thread, serger. Among the best selling hosiery machines in the past 25 years the MG-4D-45 is a versatile machine that sews well on delicate fabrics as well as mid-weight cotton.

WHY it's better

The stitch itself is a high count dense stitch that can hold up to wear. Because of the superior engineering the stitch is consistent and will not pucker or lift. As a panel seam for lingerie or for toe closing, it is a very low profile stitch. This makes it suitable for very delicate applications.

HOW it's better

As with all Merrow Machines, the accuracy of the stitch is a critical advantage when sewing high stitch count seams on delicate goods. The MG-4D-45 sews a mock-safety stitch at 5500 RPM with two needles. The wide array of needle plates and presser feet allow customers a great degree of flexibility adjusting the machine to their materials.

WHERE it's used

The applications for this machine generally involve seams that come into contact with the body. Used in factories around the world for decades, the MG-4D-45 is often found in hosiery production facilities as well as small cottage manufactures around the world