



THM-26B

Features

- Produce five(5) different ornamental stitches.
- Suitable for heavy materials.
- Automatic presser foot lift.
- Semi-Long arm (working space 320 mm).
- Cord insert available.
- Reverse stitch.
- Easy to change the cam.
- Available to adjust the height of roller presser foot at 4.0mm MAX.



SEWING CONDITION

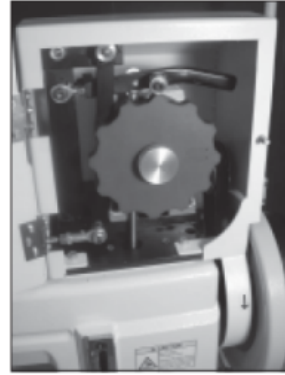

CAM SECTION

Specifications

Variety	THM-26B
Number of needle	Two needle
Max. sewing speed	550 (s.p.m.)
Max. stitch length	5/16" (8 mm)
Clearance under presser foot	25/64" (9 mm)
Needle bar stroke	2-13/64" (50 mm)
Needle(standard)	DDx1 (#24)
Thread	#2 to #00 (standard #2)
Needle Gauge	6.5mm (standard)
Hook	Large oscillating shuttle hook
Presser foot lifting	Pneumatic 10mm
Thread take up lever	Cam type
Lubrication	Hand type
Bed size	572 x 253 mm
Working space	320 x 182 mm
Motor	Ac Servo Motor
Net weight(Head only)	73Kg