


VF2300M CLASS

New feature to PREVENT OIL LEAKAGE from

Useful HANDWHEEL for usual operation and adjustments

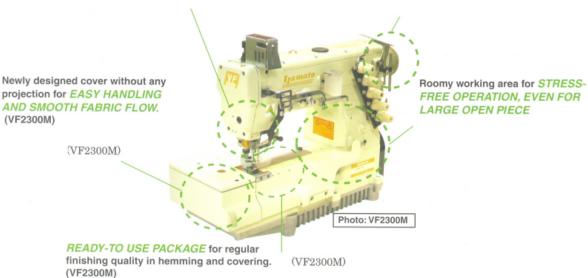

Numbering on Model

Specifications



- Symbol of Series
- ② Class No.
- 3 Submodel
- Top Cover Thread Mechanism
- : 1 = With Top Cover Thread Mechanism
- (§) Needle Distance : 32 = 3.2 mm, 40 = 4.0 mm, 48 = 4.8 mm, 56 = 5.6 mm, 64 = 6.4 mm
- 6 Shape of Stitch Tongue on Stitch Plate
- : M = Standard

Model	Application		۵	↔ mm	→ <u>+</u>	→ + +	1 0	† mm	1	rpm
VF2300M	LSa-1/605 (608,407,602) EFa-1/605 (408,407,602)	UY128GAS 2,3	4,5	3.2, 4.0 4.8, 5.6 6.4	1.4~3.6	7	1:0.7 - 1:2.0	7 (5.6)	31	6000
VF2303M	BSb-1/805 (40.407.00)			0.4		=	◎ -:	. (3.0)		0000